




## **BTH260 Premium Bluetooth Sport Headphones**

### User Manual

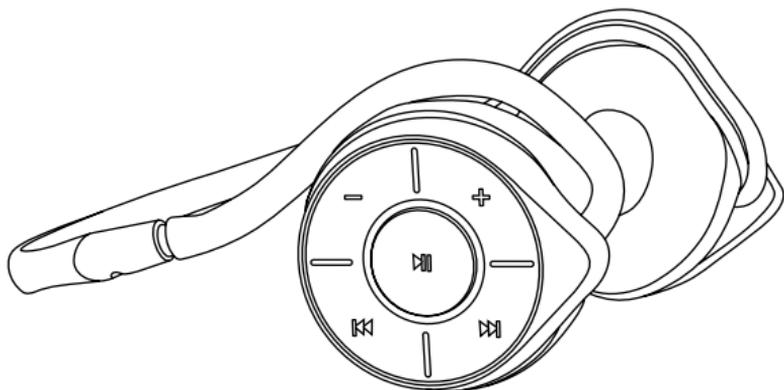

© 2015 Kinivo, Inc. All rights reserved.

Kinivo is a trademark of Kinivo, Inc. Bluetooth word mark and the Bluetooth logo are registered trademarks of Bluetooth SIG. All other trade names are registered trademarks of respective manufacturers. This manual may not be copied in any media or form without the written consent of Kinivo, Inc.

#### **Kinivo Product Support**

Online : <http://support.kinivo.com>

Email : [support@kinivo.com](mailto:support@kinivo.com)

---



**English:** Thank you for choosing Kinivo. Our user manuals are available in multiple languages at <http://downloads.kinivo.com>



**français:** Merci d'avoir choisi Kinivo. Nos modes d'emploi sont disponibles en plusieurs langues sur <http://downloads.kinivo.com>



**Deutsch:** Danke für die Wahl von Kinivo. Unsere Bedienungsanleitungen sind unter <http://downloads.kinivo.com> in mehreren Sprachen verfügbar



**español:** Gracias por elegir Kinivo. Nuestros manuales de usuario están disponibles en varios idiomas en <http://downloads.kinivo.com>



**italiano:** La ringraziamo per aver scelto Kinivo. I nostri manuali utente sono disponibili presso <http://downloads.kinivo.com>



**日本の:** Kinivo製品をお選びいただき、まことにありがとうございます。弊社取扱説明書は<http://downloads.kinivo.com>にて多言語でご覧いただけます。

---

# Table of Contents

● <b>Introduction</b> .....	4
● <b>Important Safety Instructions</b> .....	4
● <b>Headphone Overview</b> .....	5
● <b>Package Contents</b> .....	5
● <b>Charging</b> .....	6
● <b>Powering On</b> .....	6
Standby Mode / Idle Feature .....	7
● <b>Bluetooth Pairing</b> .....	7
Windows Vista, 7, 8, 8.1, 10.....	8
Mac OS.....	8
● <b>Answering Calls</b> .....	9
● <b>Operations</b> .....	9
● <b>Factory Reset</b> .....	10
● <b>Specifications</b> .....	11
● <b>Warranty</b> .....	12
● <b>Online Support / Contact Us</b> .....	13

---

## Introduction

Read all safety and operation instructions before using the Premium Bluetooth Sports Headphones.

**Warning:** To reduce the risk of fire or electric shock, do not expose the product to water or moisture.


## Important Safety Instructions

1. Do not expose the BTH260 to liquid, moisture or areas of high humidity.
2. Do not use abrasive cleaners to clean the BTH260 as they may damage the unit. Always unplug and power off the unit before cleaning.
3. Do not expose the BTH260 to extremely high or low temperatures.
4. Do not attempt to open or modify the BTH260 in any way.
5. Keep the unit away from direct sunlight.
6. Refer to your State's driving laws to see if they permit using Stereo Headphones while driving.
7. To avoid electronic interference and/or compatible conflicts, turn off the BTH260 in any facilities where posted notices instruct you to do so. For example: Aircraft, Military Base, Hospital or Health Care Facilities.
8. To avoid impairing your hearing in the long-term operation, keep the playback volume at a moderate level.
9. Keep away from fire, water, and high voltage equipments.
10. Store the headphones in a cool dry place.
11. The BTH260 contains a lithium ion battery. Lithium ion batteries are

flammable and can cause fire if misused or defective.

12. Always dispose of the packaging and unit in accordance with the local regulations and in a responsible manner.

## Headphone Overview

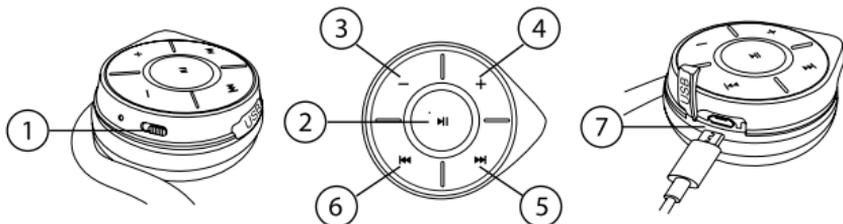

1. On/Off switch
2. Multifunction (Play/Pause, Pairing, Answer/End call)
3. Volume -
4. Volume +
5. Next track
6. Previous track
7. Charging port

For additional information and features of the Bluetooth controls, please refer to the Charging section of this user manual.

## Package Contents

- BTH260 Premium Bluetooth Sport Headphones
- Micro USB Charging Cable
- Quick Reference Guide
- Carrying Case

## Charging

Before using the BTH260 headphones, make sure they are fully charged.

When the headphones are powered on, the voice prompt will say “Battery High” (100%-70%), “Battery Medium” (70%-20%), or “Battery Low” (20% and lower) depending on the battery level. To charge the BTH260 headphones, connect one end of the micro USB power cable to the BTH260 and the other end to a USB power source. USB power sources include computers, laptops, USB hubs, USB AC adapters, and USB car chargers.

When the BTH260 is charging, the red light will be lit. When the battery is fully charged, the red light will turn off. The charging process can take 1.5 to 2 hours to charge the battery completely.

When the BTH260 has a low battery, the red light will blink intermittently and the headphones will play an audible tone while powered on. The voice prompt will say “Battery Low”.

iOS devices such as the iPod, iPhone and iPad will display the battery level of the BTH260 headphones.

## Powering On

Slide the power switch forward. The LED will light up and the voice prompt will say either “Battery High, Battery Medium or Battery Low”. If the headphones have not been paired to any device the LED will rapidly blink blue and red as they enter pairing mode.

To power off the BTH260, slide the power switch backward. The LED will go out and the voice prompt will say “Lost Connection” if the headphones were connected to a device.

If music is playing on your device when the headphones are powered off, the music will pause.

## **Standby Mode / Idle Feature**

When the headphones are powered on and are inactive after several minutes of use, they will automatically enter standby mode. In this state, the BTH260 will preserve battery power. To awaken the device, simply play audio with the device it is connected to or press any button on the BTH260.

## **Bluetooth Pairing**

- a. Ensure the headphones are powered on, then enter the pairing mode on the headphones by pressing and holding the multifunction button for 6 seconds until the blue and red lights start flashing alternatively. The voice prompt will say “Connected”.
- b. Follow the operating instruction of your Bluetooth device to start the pairing process. When pairing is successful, the voice prompt will say “Paired”.

### **For iPad, iPhone, iPod Touch**

Navigate to Settings > General > Bluetooth (On), then select the Kinivo BTH260 to pair the headphones.

## For Android smartphones

Navigate to Settings > Wireless & networks > Bluetooth settings while Bluetooth is enabled, then select Scan for devices. Select the Kinivo BTH260 to pair the headphones.

## Windows Vista, 7, 8, 8.1, 10

- a. Make sure your computer is Bluetooth enabled and supports Bluetooth stereo (A2DP).
- b. After putting the BTH260 headphones in pairing mode, right click the Bluetooth tray icon then select 'Add a Device' from the context menu. Under **Windows 8**, type "Add a Bluetooth device"
- c. Locate the Kinivo BTH260 from the devices list and click the Next button.
- d. After your computer has loaded the device and the drivers for the headphones, you should see that the device has successfully connected. Continue by clicking Close on the Add a device window and closing the second information window.
- e. Right click the Volume control tray icon then select 'Playback devices' from the context menu.
- f. Select the Headphones (Bluetooth Hands-free Audio by left clicking the device then click 'Set Default'.
- g. Hit OK to close the window. The Kinivo BTH260 headphones should now play audio from your computer.

## Mac OS

- a. After putting the BTH260 headphones in pairing mode, click the Bluetooth tray icon then select 'Set Up Bluetooth Device' from the drop down menu.

- b. Locate the Kinivo BTH260 from the devices list and click Continue.
- c. You should see that the device pairing has successfully completed. Continue by clicking Quit.
- d. To use the headphones as the default audio device, click the Bluetooth tray icon and hover over the BTH260 option then select 'Use as Audio Device'.
- e. The next time you adjust the volume in the menu bar or play music, the computer will automatically connect to the headphones.

## Answering Calls

- a. Press the center Play/Pause button to answer any incoming phone call.
- b. Press the same button to cancel any ongoing call.

## Operations

Function	Operation
Toggle unit on/off	Slide the power switch forward to power on, backward to power off.
Bluetooth pairing mode	While the headphones are powered on, press and hold multifunction button for approximately 6 seconds. (Red and Blue LED blinking alternatively)
Reconnect bluetooth (in standby mode)	Press any button

Voice command Voice dialing (Siri for supported iPhones)	To use this feature your mobile device must support the voice dialing function. 1. Press the multifunction button twice in quick succession. You will hear a beep prompt. 2. Give voice command.
Answer call End call	Press multifunction button
Reject incoming call	Press and hold multifunction button for 2 seconds
Switch audio between phone and BTH260	While in a call, press and hold multifunction button for 2 seconds
Increase volume	Press volume + button
Decrease volume	Press volume - button
Play music Pause music	Press multifunction button
Next track	Press next track button
Previous track	Press previous track button

## Factory Reset

**WARNING:** Performing a factory reset on the BTH260 will delete any previous pairings and will restore the headphones to factory default settings. Only perform this if you are experiencing any issues with the product. **(This procedure can only be done while no audio is playing and cannot be**

### performed during a phone call)

1. Power on the BTH260 headphones.
2. Press the volume - and the multifunction button simultaneously for 8 seconds. A purple LED will flash when the reset is completed.
3. The next time the BTH260 is powered on they will automatically enter pairing mode.

**Note:** The factory reset will only work if there are no phone calls in progress or music playing through the headphones. After factory reset, you will need to remove the previous BTH260 pairing from your Bluetooth device and repeat the pairing process.

## Specifications

Bluetooth Specification	Version 4.0 apt-X codec support A2DP 1.2 (Music/media) AVRCP 1.4 (Control Buttons) HFP v1.6 wideband speech (HD voice ready) / HSP v1.2 for phone calls, Skype, Lync, VoIP.
RF Frequency Range	2.402-2.480 GHz, 2.4G ISM band
Radio Performance	Receive Sensitivity of -90 dBm, TX Power Max 4 dBm
Frequency Response	20 Hz - 20 kHz

Very High Signal to Noise Ratio (SNR)	95dB
Total Harmonic Distortion (THD)	0.1%
5 Button Design	MFB, VOL+, VOL-, Next, Previous
LED Indicator Status	Blue, Red
Power Source	Rechargeable 350mAh Li-Polymer Battery Micro-USB Charging Port
Charging Input	DC 5V & 350mA
Normal Charging Time	2 ~ 3 hours
Operating Temperature	-10 °C ~ 55 °C
Storage Temperature	-20 °C ~ 80 °C
Talk Time / Play Time	Up to 25 hours
Standby Time	Up to 400 hours

## Warranty

1 Year Limited Hardware Warranty.

Kinivo hereby warrants to the customer of record that this product is in good-working condition and free from defects in material or workmanship under normal use for a duration of 1 year after the date of purchase. The product has been tested to meet the highest quality standards in each testing category. In the unlikely event that the product proves to be defective, Kinivo will repair or replace the product free of charge. If replacement is required and if Kinivo then no longer carries the same product, then Kinivo reserves the right to substitute

the product with a replacement product of like quality and size, suitable for the intended use.

This warranty is limited to repair or replacement of the mentioned product only, is non-transferable and does not extend to any product damaged by misuse, natural disasters or any other circumstances beyond Kinivo's control. The warranty does not cover or provide for the reimbursement or payment of incidental or consequential damage resulting from breach of the limited warranty described above. Except for the limited warranty described above we offer no other warranties expressed or implied, and other than limited warranty expressly contained herein, we hereby disclaim any and all warranties, including without limitation any implied warranties of merchantability, suitability or fitness for a particular purpose.

If your product is not functioning or you have any concerns please contact Kinivo Support before returning the product.

## Online Support / Contact Us

Please visit us at [support.kinivo.com](http://support.kinivo.com) or [www.kinivo.com](http://www.kinivo.com) for support information, downloads and how-to's. You may also reach us via email or live chat (details below).

Kinivo Product Support

Email : [support@kinivo.com](mailto:support@kinivo.com)

Live chat : <http://support.kinivo.com>

# KINIVO®

**1** year limited  
hardware warranty

---

**Kinivo Product Support**

Online : <http://support.kinivo.com>

Email : [support@kinivo.com](mailto:support@kinivo.com)

Made in china

